

Form 10-300  
(July 1969)UNITED STATES DEPARTMENT OF THE INTERIOR  
NATIONAL PARK SERVICENATIONAL REGISTER OF HISTORIC PLACES  
INVENTORY - NOMINATION FORM

(Type all entries - complete applicable sections)

STATE:

Missouri

COUNTY:

St. Louis County

FOR NPS USE ONLY

ENTRY NUMBER

DATE

1. NAME				
COMMON: St. Stanislaus Seminary				
AND/OR HISTORIC: The Rock Building, The Tertian Building, The Juniorate				
2. LOCATION				
STREET AND NUMBER: 700 Howdershell Road *				
CITY OR TOWN: Florissant				
STATE: Missouri		CODE: 63031	COUNTY: St. Louis	CODE: 189
3. CLASSIFICATION				
CATEGORY (Check One)		OWNERSHIP		STATUS
<input checked="" type="checkbox"/> District <input type="checkbox"/> Building <input type="checkbox"/> Site <input type="checkbox"/> Structure <input type="checkbox"/> Object		<input type="checkbox"/> Public <input checked="" type="checkbox"/> Private <input type="checkbox"/> Both		<input checked="" type="checkbox"/> Occupied <input type="checkbox"/> Unoccupied <input checked="" type="checkbox"/> Preservation work in progress
		Public Acquisition: <input type="checkbox"/> In Process <input type="checkbox"/> Being Considered		ACCESSIBLE TO THE PUBLIC Yes: <input checked="" type="checkbox"/> Restricted <input type="checkbox"/> Unrestricted <input type="checkbox"/> No
PRESENT USE (Check One or More as Appropriate)				
<input type="checkbox"/> Agricultural <input type="checkbox"/> Government <input type="checkbox"/> Park <input type="checkbox"/> Transportation <input type="checkbox"/> Comments <input type="checkbox"/> Commercial <input type="checkbox"/> Industrial <input type="checkbox"/> Private Residence <input type="checkbox"/> Other (Specify) <input type="checkbox"/> Educational <input type="checkbox"/> Military <input checked="" type="checkbox"/> Religious <input type="checkbox"/> Entertainment <input checked="" type="checkbox"/> Museum <input type="checkbox"/> Scientific				
4. OWNER OF PROPERTY				
OWNER'S NAME: The Missouri Province Educational Institute				
STREET AND NUMBER: 3511 West Pine Boulevard				
CITY OR TOWN: St. Louis		STATE: Missouri		CODE: 63108
				29
5. LOCATION OF LEGAL DESCRIPTION				
COURTHOUSE, REGISTRY OF DEEDS, ETC.: Recorder of Deeds				
STREET AND NUMBER: St. Louis County Courthouse				
CITY OR TOWN: Clayton		STATE: Missouri		CODE: 63105
				29
6. REPRESENTATION IN EXISTING SURVEYS				
TITLE OF SURVEY: Missouri Historic Sites Catalogue				
DATE OF SURVEY: 1963 <input type="checkbox"/> Federal <input checked="" type="checkbox"/> State <input type="checkbox"/> County <input type="checkbox"/> Local				
DEPOSITORY FOR SURVEY RECORDS: State Historical Society of Missouri				
STREET AND NUMBER: Hitt and Lowry streets				
CITY OR TOWN: Columbia		STATE: Missouri		CODE: 65201
				29

\*Congressional District #2 James W. Symington

SEE INSTRUCTIONS

STATE: Missouri

COUNTY: St. Louis

FOR NPS USE ONLY

ENTRY NUMBER

DATE

## 7 DESCRIPTION

CONDITION	(Check One)					
	<input type="checkbox"/> Excellent	<input checked="" type="checkbox"/> Good	<input type="checkbox"/> Fair	<input type="checkbox"/> Deteriorated	<input type="checkbox"/> Ruins	<input type="checkbox"/> Unexposed
	(Check One)			(Check One)		
	<input type="checkbox"/> Altered	<input checked="" type="checkbox"/> Unaltered	<input type="checkbox"/> Moved	<input checked="" type="checkbox"/> Original Site		

DESCRIBE THE PRESENT AND ORIGINAL (if known) PHYSICAL APPEARANCE

Six educational and residential buildings surround the central quadrangle of St. Stanislaus Seminary, including three buildings of nineteenth and three of twentieth-century origin. These Seminary buildings are situated on the east side of Howdershell Road, one-half mile south of the junction of Howdershell and Charbonier Roads, in Florissant, Missouri (St. Louis County). Included on the Seminary grounds are various other structures of religious and administrative function, but all are of later origin. An exception is the early brick barn located west of Howdershell Road opposite the quadrangle. The large tract upon which the barn is situated is being sold for residential development by the Missouri Province Educational Institute, the curators of St. Stanislaus Seminary. Likewise, the Province must dispose of the buildings constructed in more recent years, including the Chapel (1923), the Novitiate (1950), and the new Juniorate (1942). These newer quarters, situated in a row north of the historic buildings, do not especially conform to the architecture of the early structures hereby presented for inclusion in the National Register of Historic Places. The Missouri Province Educational Institute is negotiating to sell the later buildings to a new occupant who has given assurances they will not structurally alter the three, but will need to significantly modify all interiors to conform to a new, possibly secular, function. The Jesuits will retain in their possession the Rock Building, the Tertian Building, the Juniorate, and approximately 100 acres of parkland fronting the three early structures. These historic buildings should be recognized as the St. Stanislaus Seminary Historic District.

The Rock Building, facing east-north-east away from the quadrangle, is a three-and-one-half story limestone-block building constructed in broken courses of cut stone in a modified Federal style of architecture. Completed in 1849, the Seminary remains today in nearly unaltered form. The east (primary) facade of the structure is divided into nine-bays, of which five are projected: three central and two end bays. Each bay contains a double-hung sash window of twelve-over-twelve lights on the first floor, an eight-over-twelve light on the second floor, and an eight-light casement window on the third. Basement windows are six-light and of steel-frame design, obviously a later addition. Stone lintels appear above all windows. Shutters (probably original) appear on the first, second and third floor windows, but not on the basement, and the absence of hooks suggest no shutters have ever been used on the ground floor windows. Entrance to the Rock Building is provided through a doorway in the central bay sheltered by a Greek Revival porch and surrounded by a rock stairway with concrete risers (probably a later addition or modification). A recessed doorway appears in the central bay at the second floor level, surrounded by several side-panel lights and embellished by a bracketed entablature and a statue of the Virgin Mary. A pediment three-bays in width rises modestly above the central bays

SEE INSTRUCTIONS

# SIGNIFICANCE

PERIOD (Check One or More as Appropriate)

- ☐ Pre-Columbian      ☐ 16th Century      ☐ 18th Century      ☐ 20th Century  
☐ 15th Century      ☐ 17th Century      ☒ 19th Century

SPECIFIC DATE(S) (If Applicable and Known) 1849-1971

AREAS OF SIGNIFICANCE (Check One or More as Appropriate)

- |  |                                       |   |  |
|--|---------------------------------------|---|--|
| <input type="checkbox"/> Aboriginal              | <input type="checkbox"/> Education    | <input type="checkbox"/> Political                      | <input type="checkbox"/> Urban Planning        |
| <input type="checkbox"/> Prehistoric             | <input type="checkbox"/> Engineering  | <input checked="" type="checkbox"/> Religion/Philosophy | <input type="checkbox"/> Other (Specify) _____ |
| <input type="checkbox"/> Historic                | <input type="checkbox"/> Industry     | <input type="checkbox"/> Science                        | _____  |
| <input type="checkbox"/> Agriculture             | <input type="checkbox"/> Invention    | <input type="checkbox"/> Sculpture                      | _____  |
| <input checked="" type="checkbox"/> Architecture | <input type="checkbox"/> Landscape    | <input type="checkbox"/> Social/Humanitarian            | _____  |
| <input type="checkbox"/> Art                     | <input type="checkbox"/> Architecture | <input type="checkbox"/> Theater                        | _____  |
| <input type="checkbox"/> Commerce                | <input type="checkbox"/> Literature   | <input type="checkbox"/> Transportation                 | _____  |
| <input type="checkbox"/> Communications          | <input type="checkbox"/> Military     |   |  |
| <input type="checkbox"/> Conservation            | <input type="checkbox"/> Music        |   |  |

## STATEMENT OF SIGNIFICANCE

The Rock Building at St. Stanislaus Seminary, Florissant, Missouri, is significant as the earliest surviving structure at the first Jesuit novitiate established west of the Mississippi River. Completed in 1849, the Rock Building was the first permanent building at the novitiate, designed to replace less substantial structures which had quartered the seminary since its founding. (Gilbert J. Garraghan, Jesuits of the Middle United States, 1938, I, 604-606). St. Stanislaus Seminary was established in 1823 as a mission school to train Indian children from the neighboring tribes of the Missouri Valley. Built upon a farm in St. Louis County donated to the Society of Jesus by the Bishop of Louisiana, Bishop William DuBourg, the Indian school began instruction in the log farm buildings which had quartered DuBourg's tenant. By the fall of 1824 a large log cabin had been built to supplement the farm dwellings, providing adequate facilities for the school. An additional frame house was erected on the site during 1828 and teaching continued in the wooden school buildings until completion of the Rock Building.

Construction of the Rock Building commenced in June, 1840, and the cornerstone was dedicated in 1844. (The Story of One-Hundred Years at St. Stanislaus Seminary, 1923, 3-4). Bricks for the walls were fired at the seminary and limestone blocks for the foundation and exterior were hauled overland from the bluffs of the Missouri River. Jesuit brothers, novices, and slaves in residence at St. Stanislaus Seminary provided all of the labor necessary to complete the Rock Building, including blasting, transporting and cutting limestone used in the construction. The foundation was completed above the ground level before 1844. The Rock Building was dedicated in 1849, and the first mass in the new novitiate was said on July 29th of that year. One Jesuit resident boastfully described the edifice as "the best building in the whole state of Missouri for solidity, convenience, and elegance." (Garraghan, I, 1938, 604).

Bishop DuBourg initially conceived the establishment of a seminary to minister to the Indians of the Louisiana Territory. The Bishop had reasoned that the spiritual needs of the tribes had been neglected and he had attempted to encourage individual Jesuit missionaries to journey into the lower Missouri and Osage Valleys to

SEE INSTRUCTIONS

## 9. MAJOR BIBLIOGRAPHICAL REFERENCES

Biever, Albert H., The Jesuits in New Orleans and the Mississippi Valley. New Orleans, Hauser Printing Company, 1924.

Campbell, Thomas J., The Jesuits 1534-1921: A History of the Society from its Foundation to the Present Time, Vol. II. New York: The Encyclopedia Press, 1921.

## 10. GEOGRAPHICAL DATA

LATITUDE AND LONGITUDE COORDINATES DEFINING A RECTANGLE LOCATING THE PROPERTY			O R	LATITUDE AND LONGITUDE COORDINATES DEFINING THE CENTER POINT OF A PROPERTY OF LESS THAN TEN ACRES		
CORNER	LATITUDE Degrees Minutes Seconds	LONGITUDE Degrees Minutes Seconds		LATITUDE Degrees Minutes Seconds	LONGITUDE Degrees Minutes Seconds	
NW	° ' "	° ' "		38° 48' 05"	90° 21' 50"	
NE	° ' "	° ' "				
SE	° ' "	° ' "				
SW	° ' "	° ' "				

APPROXIMATE ACREAGE OF NOMINATED PROPERTY: Less than 10

LIST ALL STATES AND COUNTIES FOR PROPERTIES OVERLAPPING STATE OR COUNTY BOUNDARIES

STATE	CODE	COUNTY	CODE
STATE	CODE	COUNTY	CODE
STATE	CODE	COUNTY	CODE
STATE	CODE	COUNTY	CODE

## 11. FORM PREPARED BY

NAME AND TITLE: Stephen J. Raiche, Chief Research Historian

ORGANIZATION: Missouri State Park Board DATE: Nov. 20, 1971

STREET AND NUMBER: State Historical Survey and Planning Office

CITY OR TOWN: 1204 Jefferson Building, Box 176 STATE: Missouri CODE: 65101

Jefferson City 29

## 12. STATE LIAISON OFFICER CERTIFICATION

## NATIONAL REGISTER VERIFICATION

As the designated State Liaison Officer for the National Historic Preservation Act of 1966 (Public Law 89-665), I hereby nominate this property for inclusion in the National Register and certify that it has been evaluated according to the criteria and procedures set forth by the National Park Service. The recommended level of significance of this nomination is:

National ☒ State ☐ Local ☐

Name: Joseph Jaeger, Jr.

Title: Director, State Park Board  
State Liaison Officer

Date: 8 March 1972

I hereby certify that this property is included in the National Register.

Robert H. Wiley  
Chief, Office of Archeology and Historic Preservation

Date: 9/22/72

ATTEST

William M. Smith  
Keeper of The National Register

Date

SEE INSTRUCTIONS

NATIONAL REGISTER OF HISTORIC PLACES  
INVENTORY - NOMINATION FORM

(Continuation Sheet)

STATE	
Missouri	
COUNTY	
St. Louis County	
FOR NPS USE ONLY	
ENTRY NUMBER	DATE

(Number all entries)

6. #1

ST. STANISLAUS SEMINARY  
THE ROCK BUILDING, THE TERTIAN BUILDING, THE JUNIORATE

Missouri's Contribution to American Architecture (John A. Bryan)

State

Published: The St. Louis Architectural Club

1928

Code: 29

Historic American Buildings Survey

National

Historic American Buildings Survey

National Park Service

Washington, D.C. 20020

1941

Code: 08

Missouri State Historical Survey

State

Missouri State Park Board

Box 176

1204 Jefferson Building

Jefferson City, Missouri 65101

1971

Code: 29

One-Hundred Historic Buildings in St. Louis County

Local

St. Louis County Department of Parks and Recreation

Clayton, Missouri 63105

1970

Code: 29

NATIONAL REGISTER OF HISTORIC PLACES  
INVENTORY - NOMINATION FORM

(Continuation Sheet)

STATE	
Missouri	
COUNTY	
St. Louis County	
FOR NPS USE ONLY	
ENTRY NUMBER	DATE

(Number all entries)

7. #1

ST. STANISLAUS SEMINARY  
THE ROCK BUILDING, THE TERTIAN BUILDING, THE JUNIORATE

to a height equal to the peak of the roof, and a modest cornice appears along all nine bays, extending slightly along each side elevation. The size of the limestone building blocks is fairly consistent throughout all facades except larger stones are to be found in the quoin pattern. An octagonal columnated cupola projects from the middle of the slated gable-roof.

The west (rear) facade is quite similar to the front elevation, although most embellishments have been removed and the projected bays eliminated. The molded cornice reappears on the rear and the window pattern has been duplicated from the main elevation. Stone lintels also appear above all windows. An archway similar to those at both ends of the buildings has been removed from the central bay, leaving a large scar from repair work. A smaller window and door have been added to the bay from which the passageway was removed, but the wall of the Rock Building was patched with stones similar in size and texture to the original work. A stone stairway leading to the central rear door has obviously been added at a later date and the third-story window in the central rear bay deviates from all others at that level as it is a double-hung sash type.

The north and south facades of the Rock Building are quite similar, both being dominated by the chimney and parapet arrangement so typical of many ante-bellum Missouri homes. Windows in these two elevations follow a regular pattern: twelve-over-twelve lights on the first floor, eight-over-twelve on the second, and casement windows in the third story. One small basement window in the south elevation has been closed with stone, probably at an early date. Two identical wooden archways project from the center of both north and south walls at the first and second stories to connect the Rock Building with two flanking structures.

The companion buildings south and north of the Rock Building, the Juniorate and the Tertian Building, were constructed in 1898-1900 as additional residences and school facilities for the Seminary. Although the buildings were constructed of brick on a squared-rubble foundation, a certain architectural compatibility was maintained with the Rock Building, especially in the similarity of front porch design and the placement of statuary above the entranceway. In both buildings, however, a decorated gable dormer replaces the central pediment, and many variations in roof style, window arrangement and cornice design appear. The companion buildings reflect a greater opulence and desire for splendor typical of late-Victorian construction, but many forms were

NATIONAL REGISTER OF HISTORIC PLACES  
INVENTORY - NOMINATION FORM

(Continuation Sheet)

STATE	
Missouri	
COUNTY	
St. Louis County	
FOR NPS USE ONLY	
ENTRY NUMBER	DATE

(Number all entries)

7. #2

ST. STANISLAUS SEMINARY  
THE ROCK BUILDING, THE TERTIAN BUILDING, THE JUNIORATE

obviously variations adopted from the older building. Both structures were built on a rectangular plan, with front facades divided into three-bays and side elevations of seven bays. The middle bay on both front elevations is projected similar to the Rock Building. Both the Juniorate and Tertian Building have truncated hip-roofs of slate, although dormers were added to the Tertian Building about 1930. The southern appendage to the Juniorate was added in 1914, giving the building an "L-plan" appearance. Although the style of the original building was carefully executed in the addition, the foundation of the newer wing is concrete and a mortar line is evident on the north wall. The Juniorate and Tertian buildings were both constructed of identical design with many similar embellishments, but subsequent modifications especially to the Juniorate have given this building a very unique appearance.

The front facades of both companion buildings are identical except for the use of double windows on the second and third floors of the Juniorate. Both structures have rounded-arch, two-over-two light windows on the first floor flanking an arched doorway. Second floor windows are likewise two-over-two light, double-hung sash type, but are embellished with a modest brick shelf above and a decorated lug sill below each pair of windows. Top floor windows do not feature the extensive brickwork but the lug sill is retained and third-floor windows in both central bays are framed in molded trim of stone. Brickwork on both buildings is arranged in Flemish bond and a boxed cornice predominates with paired brackets separating the bays at the roofline. The walls of each elevation are articulated with recessed panels framing the window and door openings, and a stone belt divided each facade between the first and second floors.

The general pattern on the front facades is maintained on all other elevations of the companion buildings except for the rear wall of the Tertian Building which has a parapet gable and windows only in the middle bay. A passageway to a demolished building has been removed from this wall. The south elevation of the Tertian Building also displays certain variations with regard to the placement of windows, and a one-story wooden bay has been appended at the center of the first floor.

The interiors of all three buildings exhibit a similarity of plan. The Rock Building once contained a chapel, but it had been removed to provide classrooms and residential accommodations. Many similar rooms of varying dimension flank a long north-south central corridor on each floor, and many of these rooms have been designated special functions,

NATIONAL REGISTER OF HISTORIC PLACES  
INVENTORY - NOMINATION FORM

(Continuation Sheet)

STATE	
Missouri	
COUNTY	
St. Louis County	
FOR NPS USE ONLY	
ENTRY NUMBER	DATE

(Number all entries)

7. #3

ST. STANISLAUS SEMINARY.  
THE ROCK BUILDING, THE TERTIAN BUILDING, THE JUNIORATE

such as small libraries and offices. A similar plan predominates in the Tertian Building, which was constructed as a school and dormitory. But the interior of the Juniorate, once quite similar to the Tertian Building, has been extensively remodeled for an infirmary and a library. But with the exception of the old addition to the Juniorate, and a modest number of window and door alterations, the three old Seminary buildings at St. Stanislaus remain basically intact as they were constructed.



NATIONAL REGISTER OF HISTORIC PLACES  
INVENTORY - NOMINATION FORM

(Continuation Sheet)

STATE	
Missouri	
COUNTY	
St. Louis County	
FOR NPS USE ONLY	
ENTRY NUMBER	DATE

(Number all entries)

8. #1

ST. STANISLAUS SEMINARY  
THE ROCK BUILDING, THE TERTIAN BUILDING, THE JUNIORATE

proselytise. As early as 1820, the Bishop of Louisiana had been successful in convincing a few priests to venture into interior Missouri, where they ministered principally to the Osage tribe, baptising many children and spreading the Faith. (William B. Faherty, Better the Dream. St. Louis: University and Community 1818-1968, 1968, 11-12. Nina DosSantos [(trans.)], "Letters Concerning Some Missions of the Upper Mississippi Valley, A.D. 1818-1827," Records of the American Catholic Historical Society of Philadelphia, XIV, (1903), 141-153). The receptiveness of the tribesmen to the Jesuit "Black Robes" encouraged DuBourg to petition the United States Government for financial assistance in the missionary endeavor. The Bishop furthermore assured President Monroe that the Jesuits would secure the loyalty of the tribes to the American Republic. (John Rothensteiner, History of the Archdioceses of St. Louis, 1673-1928, I, 1928, 322). Following a lengthy communication with Secretary of War John C. Calhoun, Bishop DuBourg became aware that a more effective method of "civilizing" the tribes was to bring young Indians to a mission school near a major settlement where the childrens' contact with white society would be more intensive and complete.

The Bishop's plan for the establishment of an Indian school in Missouri coincided with an increasing interest in Indian affairs within the Monroe Administration. Liberated temporarily from foreign considerations through the Monroe Doctrine, the Administration had begun to emphasize internal matters after 1823, and the problems of tranquility with frontier Indians commanded special attention. Since the missionary aspirations of Bishop DuBourg were compatible with the Government's Indian policy, Secretary Calhoun promised financial assistance if the Bishop could persuade a Jesuit order to establish a school for Indian instruction near St. Louis. Congress had appropriated \$10,000 for maintenance of such schools, and the Administration had agreed to subsidize two-thirds of the construction cost. (Rothensteiner, 1928, I, 322. [(Calhoun's circular, dated February, 1820, is published in American Catholic Historical Researches, X, 154-159])). Calhoun furthermore promised a grant of \$200 per annum for each missionary the Bishop dispatched among the tribes of his dioceses.

Encouraged by the promise of Government support, the Bishop offered his farm in Florissant to any Jesuit province desiring to send missionaries to the Missouri frontier to establish a seminary and Indian school. Writing to Calhoun in March, 1823, Bishop DuBourg stated the seminary would be used to study "the manners of the Indians...and the arts best adapted to the great purpose of civilization." Convinced of

**NATIONAL REGISTER OF HISTORIC PLACES  
INVENTORY - NOMINATION FORM**

(Continuation Sheet)

STATE	
Missouri	
COUNTY	
St. Louis County	
FOR NPS USE ONLY	
ENTRY NUMBER	DATE

(Number all entries)

8. #2

ST. STANISLAUS SEMINARY  
THE ROCK BUILDING, THE TERTIAN BUILDING, THE JUNIORATE

the Bishop's sincerity, Calhoun pledged an additional \$800 annual stipend to support the school. (Calhoun to DuBourg, in Rothensteiner, 1928, I, 326). Having secured financial assurance from the Monroe Administration, (an obligation never fulfilled by the Government), the Bishop solicited the Maryland Province Jesuits to send volunteers to Missouri to operate the school. He received an enthusiastic response from the financially insolvent Whitemarsh Novitiate in the State of Maryland. Suffering a prolonged antagonism with the Archbishop of Baltimore, the small Novitiate was perpetually threatened by a dispute concerning the title of ownership to their lands. Consequently, an opportunity for a portion of the Novitiate to move to the frontier and re-establish the seminary near the Missouri River appealed to the Jesuits of Whitemarsh. On May 23, 1823, twelve Jesuits from Whitemarsh, under the leadership of Father Charles Felix VanQuickenborne, arrived at Bishop DuBourg's farm in Florissant and established the first Indian School in the Louisiana Purchase, St. Stanislaus. (Garraghan, 1938, 73, 79. A transcript of the "Concordat" or agreement between the Bishop of Louisiana and the Society of Jesus is preserved in the Archives of the Archdiocese of St. Louis, quoted in entirety in Rothensteiner, 1928, I, 329-331).

Primarily because of the Government's failure to provide the promised subsidy, the small school at Florissant began to decline and was forced to suspend Indian instruction after 1830. Furthermore, by 1830, eastern Missouri had been traversed by the westward expansion of the frontier and Indian tribes had been pushed south and westward out of the lower Missouri and Osage Valleys. Indians were rarely to be seen in St. Louis after 1830. Consequently the necessity for maintenance of an Indian school at Florissant became more difficult to justify and the Seminary began to concentrate entirely upon preparing missionaries. In this capacity St. Stanislaus flourished, especially during the late 1840's as Jesuit exiles from Europe came to America, and as the demand for instructors in the western missions increased. Such influential Priests as Father Pierre Jean DeSmet, whose work among the tribes of the upper Missouri is legendary, received his seminary training at St. Stanislaus. (Pierre Jean DeSmet, S.J., Letters and Sketches, 1843, passim. Hiram Chittenden and Alfred Richardson, Letters and Travels of Father Pierre Jean DeSmet, S.J., 4 Vols., 1905, passim). Expansion of the Seminary caused more suitable instructional and residential facilities to be built, hastening completion of the Rock Building, and eventually the two companion structures.

The two seminary buildings flanking the Rock Building were constructed

NATIONAL REGISTER OF HISTORIC PLACES  
INVENTORY - NOMINATION FORM

(Continuation Sheet)

STATE	
Missouri	
COUNTY	
St. Louis County	
FOR NPS USE ONLY	
ENTRY NUMBER	DATE

(Number all entries)

8. #3

ST. STANISLAUS SEMINARY  
THE ROCK BUILDING, THE TERTIAN BUILDING, THE JUNIORATE

between 1898 and 1900. Both structures were intended to provide facilities for students receiving instruction at more advanced levels, and with three independent buildings, the Novitiate, Tertianship, and Collegiate Seminary Program at St. Stanislaus could be maintained in individual quarters. The Tertian Building, north of the Rock Building, furnished housing and classrooms for students within three years of completion of their seminary instruction. A separate facility had been deemed essential to allow the Tertian Priests more complete isolation from the novices and to afford an environment more conducive to the study of spiritual writings. The Tertianship was transferred to Cleveland, Ohio, about 1910, and the building at St. Stanislaus thereafter became a residence for Brothers and Priest Teachers. The companion structure south of the Rock Building, the Juniorate, had quartered students in the Collegiate Seminary Program at St. Stanislaus but since 1942 it has been an infirmary, an administration building, and an extension of the novitiate. The original Juniorate was extensively enlarged in 1914, and in 1960 the second floor of the building was redesigned as a library. The Tertian and Juniorate Buildings were built by contract labor, rather than by Jesuit residents as was the Rock Building.

St. Stanislaus Seminary, the earliest Jesuit novitiate west of the Mississippi, provided personnel for other Jesuit schools throughout the west. The most important of these institutions, St. Louis University, grew from an academy established by the Bishop of Louisiana in 1818, but was administered from St. Stanislaus after 1829.

(Faherty, 1968, 19-20. Rothensteiner, 1928, I 354-356. Walter H. Hill, S.J., Historical Sketch of St. Louis University, 1879, 10-40). Jesuits from St. Stanislaus also established a similar novitiate in Georgetown, Kentucky, a high school for boys in St. Louis, and numerous missions on the upper Missouri, Columbia, Snake, and Willamette Rivers in the American west. Fathers and Brothers from the Florissant seminary also founded St. Francis Mission at Fort Pierre, Dakota Territory, St. Marys College in Kansas, and later preached in the interior ranges of the Rocky Mountains in Idaho, Wyoming, and Montana. Many other colleges and high schools were established by Jesuits from St. Stanislaus during the nineteenth century, including Creighton University in Omaha, Loyola University in Chicago, and Marquette University in Detroit.

The Seminary at St. Stanislaus was closed by the Society of Jesus in August, 1971. As the removal of the frontier necessitated a change in Jesuit teaching methods, so today have the problems of urban America persuaded the Society to abandon the isolation of the rural seminary

NATIONAL REGISTER OF HISTORIC PLACES  
INVENTORY - NOMINATION FORM

(Continuation Sheet)

STATE	
Missouri	
COUNTY	
St. Louis County	
FOR NPS USE ONLY	
ENTRY NUMBER	DATE

(Number all entries)

8. #4

ST. STANISLAUS SEMINARY  
THE ROCK BUILDING, THE TERTIAN BUILDING, THE JUNIORATE

and orient their ministry toward the central city. Appropriately the Collegiate Seminary Program has been transferred from Florissant to an inner-city location, Fusz Memorial, near the campus of St. Louis University, and the novitiate has been relocated at Rockhurst College in Kansas City. The Society will, however, preserve the nineteenth century buildings at St. Stanislaus Seminary, and will restore the Rock Building as a museum of Jesuit instruction, including many original furnishings constructed by the novices and used in the seminary since the 1850's. (Father Charles McDermott, Jesuit Faculty, St. Louis University, interviewed by Stephen J. Raiche, staff, Missouri State Historical Survey and Planning Office, September 22, 1971). The Society of Jesus has offered the remainder of the seminary buildings (constructed between 1923 and 1960) for sale to a small Protestant college desiring classroom facilities.

NATIONAL REGISTER OF HISTORIC PLACES  
INVENTORY - NOMINATION FORM

(Continuation Sheet)

STATE	
Missouri	
COUNTY	
St. Louis County	
FOR NPS USE ONLY	
ENTRY NUMBER	DATE

(Number all entries)

9. #1

ST. STANISLAUS SEMINARY  
THE ROCK BUILDING, THE TERTIAN BUILDING, THE JUNIORATE

Chittenden, Hiram, and Richardson, Alfred T., Life, Letters and Travels of Father Pierre-Jean DeSmet, S.J. 4 Vols. New York: Francis P. Harper, 1905.

Daly, Leo H. Comprehensive Services, Florissant Old Town-Phase One Report. St. Louis: Leo H. Daly Comprehensive Services, 1967.

DeSmet, Father Pierre-Jean, S.J., Letters and Sketches, With a Narrative of a Year's Residence among the Indian Tribes of the Rocky Mountains. Philadelphia: M. Fithian, 1843.

DosSantos, Nina (trans.), "Letters Concerning Some Missions of the Mississippi Valley, A.D. 1818-1827," Records of the American Catholic Historical Society of Philadelphia, Vol. XIV (1903), 141-216.

Faherty, William B., Better the Dream. St. Louis: University and Community 1818-1968, St. Louis: Art Craft Press, 1968.

Garraghan, Gilbert J., Jesuits in the Middle United States. New York: America Press, 1938.

Glennon, John Joseph, "The Coming of the Jesuit Fathers to St. Louis," St. Louis Catholic Historical Review, Vol V, (1923), 93-98.

Hill, Walter H., S.J., Historical Sketch of St. Louis University. St. Louis: Patrick Fox Publisher, 1879.

McDermott, Father Charles, S.J., Jesuit Faculty, St. Louis University, interviewed by Stephen J. Raiche, staff, Missouri State Historical Survey and Planning Office, September 22, 1971. On file at the Missouri State Park Board, Box 176, 1204 Jefferson Building, Jefferson City, Missouri 65101.

Rothensteiner, John, History of the Archdioceses of St. Louis, 1673-1928. 2 Vols., St. Louis: Blackwell Wielandy Company, 1928.

The Story of One-Hundred Years at St. Stanislaus Seminary. St. Louis: Hoffman Press, 1923(?).

NATIONAL REGISTER OF HISTORIC PLACES  
PROPERTY MAP FORM

(Type all entries - attach to or enclose with map)

STATE Missouri	
COUNTY St. Louis County	
FOR NPS USE ONLY	
ENTRY NUMBER	DATE

SEE INSTRUCTIONS

<b>1. NAME</b>			
COMMON: St. Stanislaus Seminary			
AND/OR HISTORIC: The Rock Building, The Tertian Building, The Juniorate			
<b>2. LOCATION</b>			
STREET AND NUMBER: 700 Howdershell Road			
CITY OR TOWN: Florissant			
STATE: Missouri	CODE 63031	COUNTY: St. Louis County	CODE 189
<b>3. MAP REFERENCE</b>			
SOURCE: U.S.G.S. 7.5 Quadrangle-Florissant, Missouri			
SCALE: 1:24,000			
DATE: 1954			
<b>4. REQUIREMENTS</b>			
TO BE INCLUDED ON ALL MAPS			
1. Property boundaries where required.			
2. North arrow.			
3. Latitude and longitude reference.			

Missing

NATIONAL REGISTER OF HISTORIC PLACES

PROPERTY MAP FORM

(Type all entries - attach to or enclose with map)


STATE	
Missouri	
COUNTY	
St. Louis County	
FOR NPS USE ONLY	
ENTRY NUMBER	DATE

SEE INSTRUCTIONS

<b>1. NAME</b>			
COMMON: St. Stanislaus Seminary			
AND/OR HISTORIC: The Rock Building, The Tertian Building, The Juniorate			
<b>2. LOCATION</b>			
STREET AND NUMBER:			
700 Howdershell Road			
CITY OR TOWN:			
Florissant			
STATE:	CODE	COUNTY:	CODE
Missouri 63031	29	St. Louis County	189
<b>3. MAP REFERENCE</b>			
SOURCE:			
Missouri State Park Board			
State Historical Survey and Planning Office			
SCALE:			
Not to scale			
DATE:			
1971			
<b>4. REQUIREMENTS</b>			
TO BE INCLUDED ON ALL MAPS			
1. Property boundaries where required.			
2. North arrow.			
3. Latitude and longitude reference.			

# ST. STANISLAUS SEMINARY HISTORIC DISTRICT

FLORISSANT, ST. LOUIS COUNTY, MISSOURI

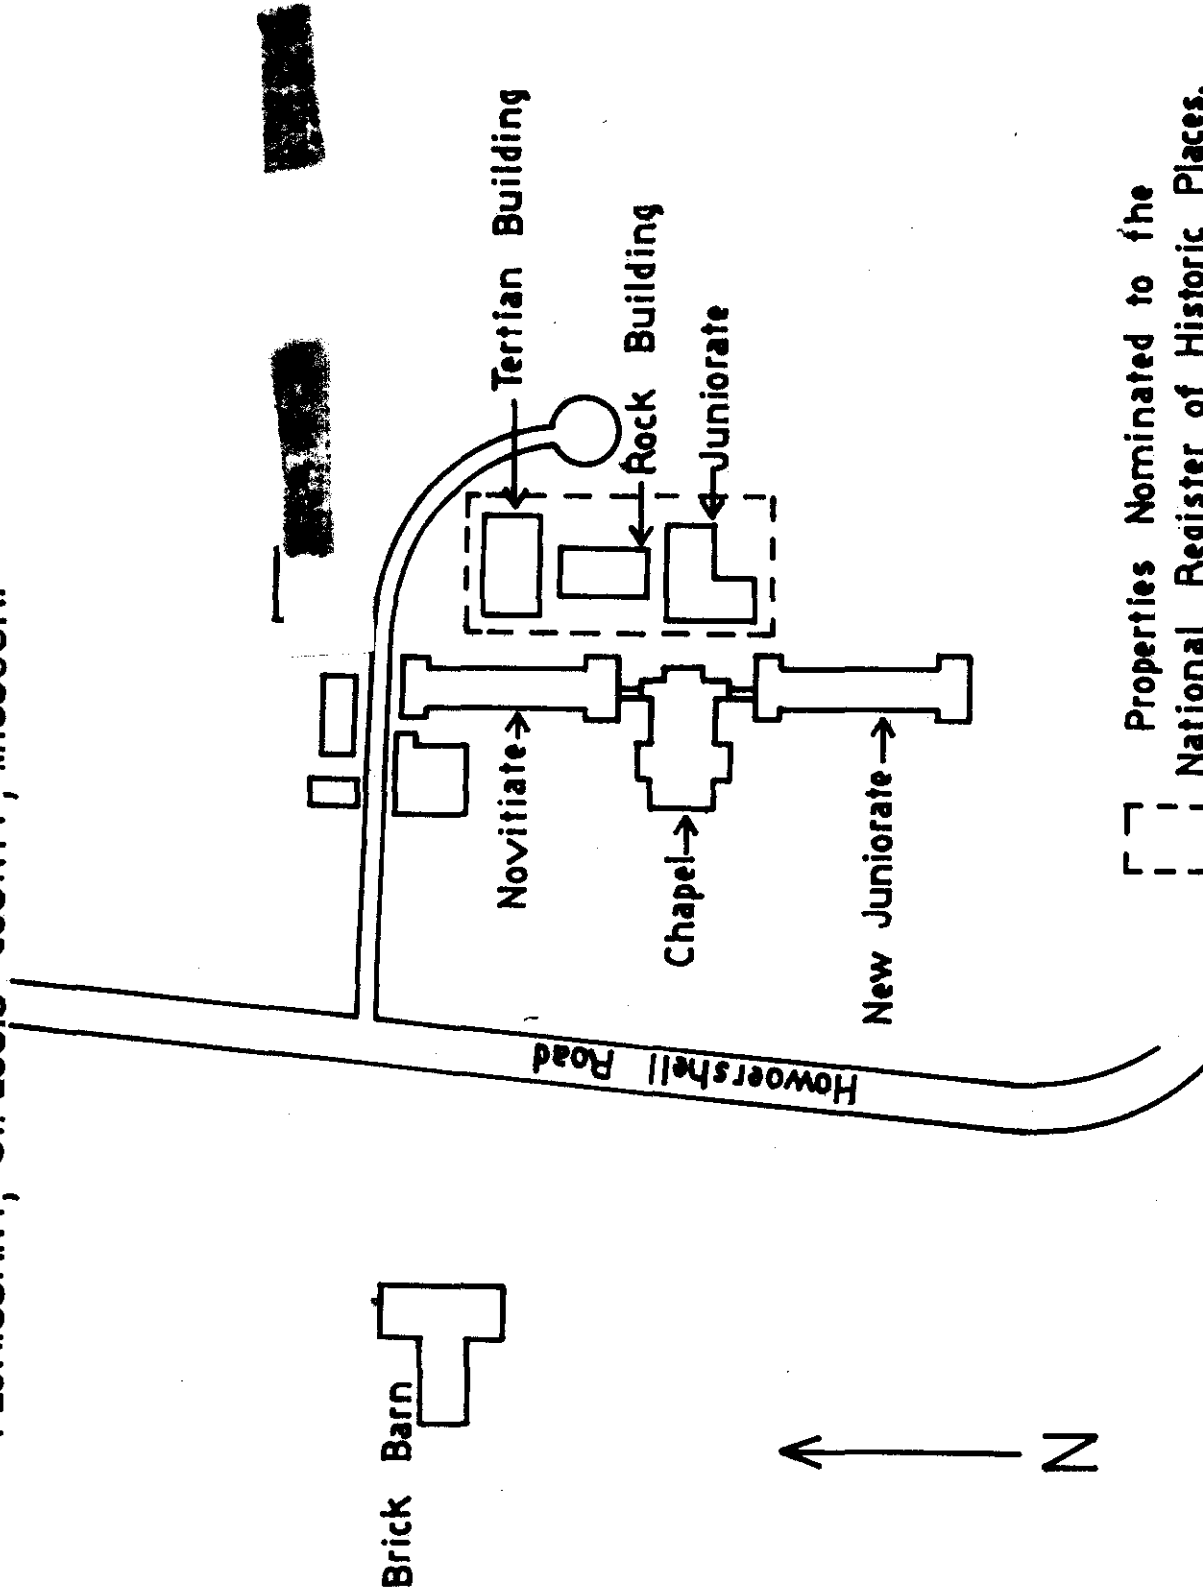

[ ] Properties Nominated to the  
[ ] National Register of Historic Places.

M.S.H.S.  
February 17, 1972.



NATIONAL REGISTER OF HISTORIC PLACES

PROPERTY MAP FORM

(Type all entries - attach to or enclose with map)


STATE Missouri	
COUNTY St. Louis County	
FOR NPS USE ONLY	
ENTRY NUMBER	DATE

SEE INSTRUCTIONS

<b>1. NAME</b>			
COMMON: St. Stanislaus Seminary			
AND/OR HISTORIC: The Rock Building, The Tertian Building, The Juniorate			
<b>2. LOCATION</b>			
STREET AND NUMBER: 700 Howdershell Road			
CITY OR TOWN: Florissant			
STATE: Missouri	CODE 63031	COUNTY: St. Louis County	CODE 189
<b>3. MAP REFERENCE</b>			
SOURCE: Missouri State Park Board State Historical Survey and Planning Office			
SCALE: Not to scale			
DATE: 1971			
<b>4. REQUIREMENTS</b>			
TO BE INCLUDED ON ALL MAPS			
1. Property boundaries where required.			
2. North arrow.			
3. Latitude and longitude reference.			

# ST. STANISLAUS SEMINARY

FLORISSANT, ST. LOUIS COUNTY, MISSOURI

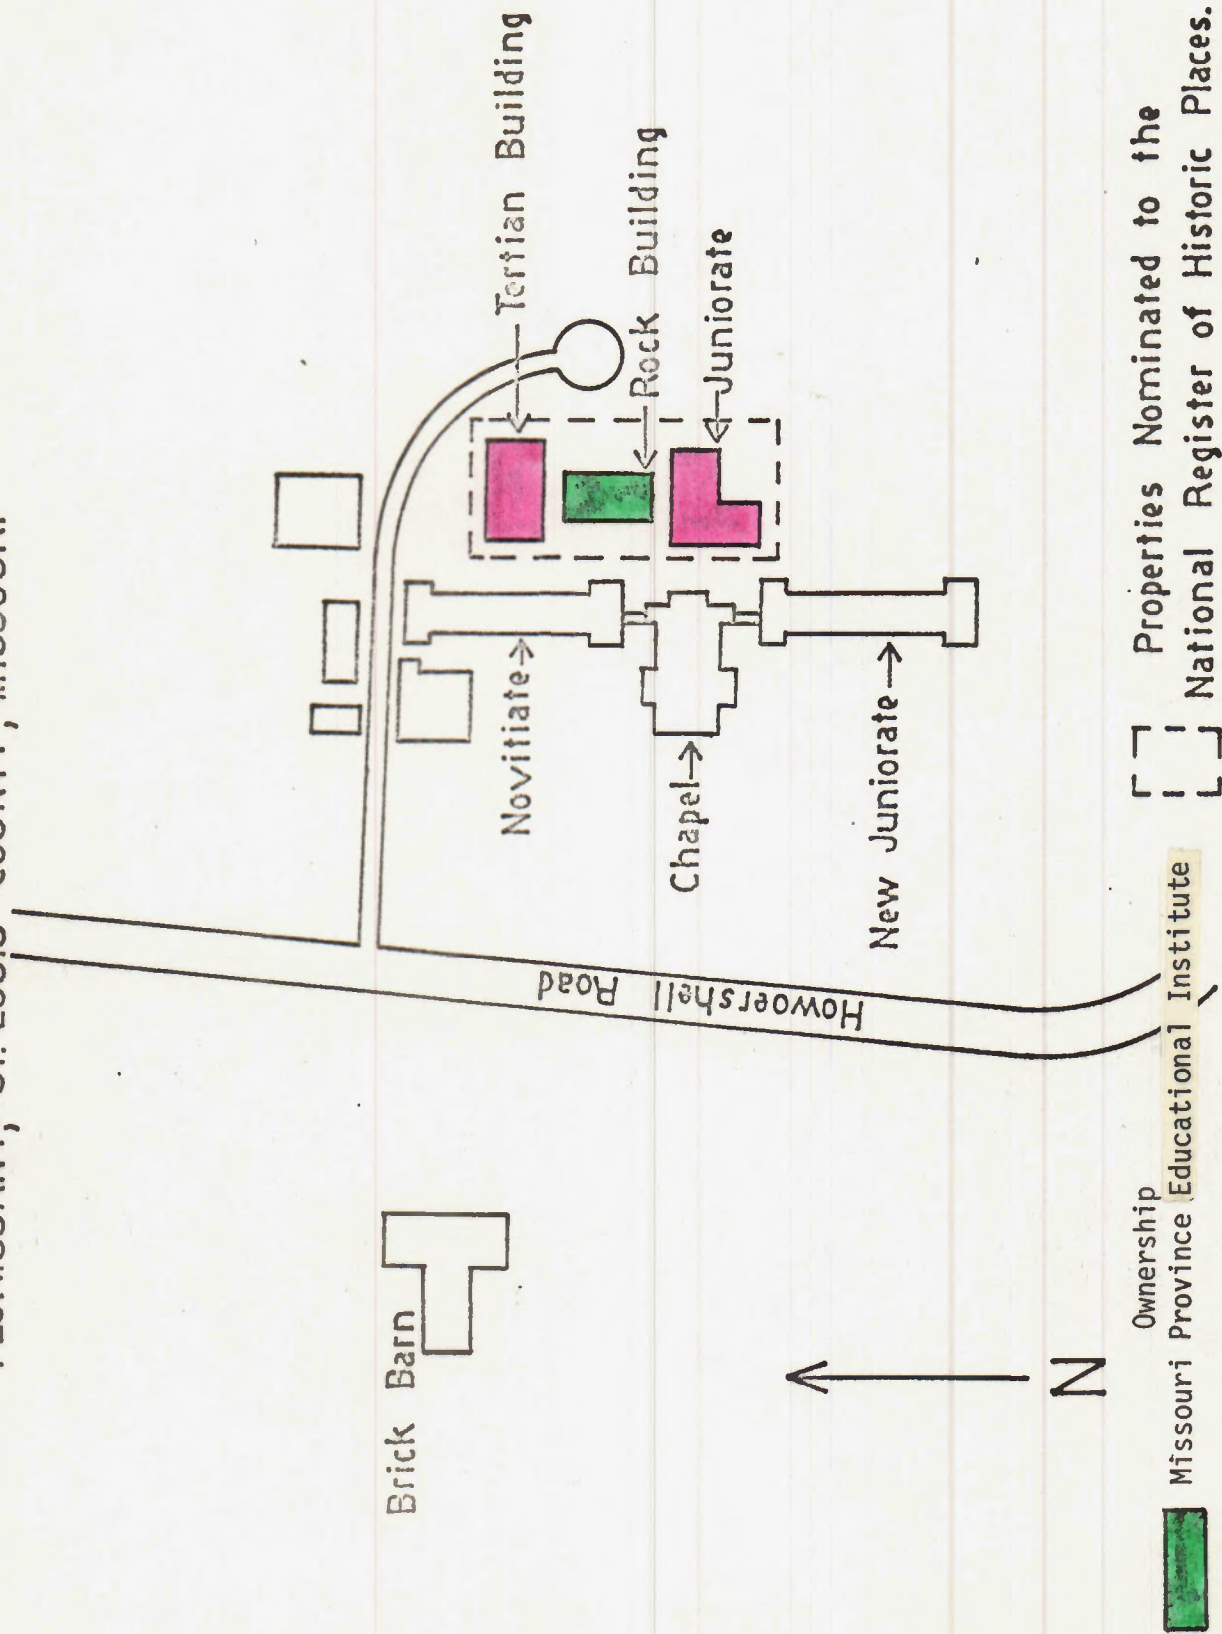

NATIONAL REGISTER OF HISTORIC PLACES

PROPERTY PHOTOGRAPH FORM

(Type all entries - attach to or enclose with photograph)

STATE Missouri	
COUNTY St. Louis County	
FOR NPS USE ONLY	
ENTRY NUMBER	DATE

SEE INSTRUCTIONS

<b>1. NAME</b>			
COMMON:		St. Stanislaus Seminary	
AND/OR HISTORIC:		The Rock Building, The Tertian Building, The Juniorate	
<b>2. LOCATION</b>			
STREET AND NUMBER:			
700 Howdershell Road			
CITY OR TOWN:			
Florissant			
STATE:	CODE	COUNTY:	CODE
Missouri	63031	29	St. Louis County
189			
<b>3. PHOTO REFERENCE</b>			
PHOTO CREDIT:		Missouri Province Educational Institute	
DATE OF PHOTO:		1971	
NEGATIVE FILED AT:		Artega Photos, 4122 W. Florissant Avenue, St. Louis, Mo. 63116	
<b>4. IDENTIFICATION</b>			
DESCRIBE VIEW, DIRECTION, ETC.			
Primary elevation, Rock Building, east to west.			



UNITED STATES DEPARTMENT OF THE INTERIOR  
NATIONAL PARK SERVICE

NATIONAL REGISTER OF HISTORIC PLACES

PROPERTY PHOTOGRAPH FORM

(Type all entries - attach to or enclose with photograph)

STATE Missouri	
COUNTY St. Louis County	
FOR NPS USE ONLY	
ENTRY NUMBER	DATE

SEE INSTRUCTIONS

<b>1. NAME</b>			
COMMON: St. Stanislaus Seminary			
AND/OR HISTORIC: The Rock Building, The Tertian Building, the Juniorate			
<b>2. LOCATION</b>			
STREET AND NUMBER: 700 Howdershell Road			
CITY OR TOWN: Florissant			
STATE: Missouri	CODE 63031	COUNTY: St. Louis County	CODE 189
<b>3. PHOTO REFERENCE</b>			
PHOTO CREDIT: Missouri Province Educational Institute			
DATE OF PHOTO: 1971			
NEGATIVE FILED AT: Artega Photos, 4122 W. Florissant Avenue, St. Louis, Mo. 63115			
<b>4. IDENTIFICATION</b>			
DESCRIBE VIEW, DIRECTION, ETC.  The Juniorate, southeast to northwest, showing primary elevation and south addition. Rock building in background.			





UNITED STATES DEPARTMENT OF THE INTERIOR  
NATIONAL PARK SERVICE

NATIONAL REGISTER OF HISTORIC PLACES

PROPERTY PHOTOGRAPH FORM

(Type all entries - attach to or enclose with photograph)

STATE Missouri	
COUNTY St. Louis County	
FOR NPS USE ONLY	
ENTRY NUMBER	DATE

SEE INSTRUCTIONS

<b>1. NAME</b>			
COMMON: St. Stanislaus Seminary			
AND/OR HISTORIC: The Rock Building, The Tertian Building, The Juniorate			
<b>2. LOCATION</b>			
STREET AND NUMBER: 700 Howdershell Road			
CITY OR TOWN: Florissant			
STATE: Missouri	CODE 63031	COUNTY: St. Louis County	CODE 189
<b>3. PHOTO REFERENCE</b>			
PHOTO CREDIT: Missouri Province Educational Institute			
DATE OF PHOTO: 1971			
NEGATIVE FILED AT: Artega Photos, 4122 W. Florissant Avenue, St. Louis, Mo. 63115			
<b>4. IDENTIFICATION</b>			
DESCRIBE VIEW, DIRECTION, ETC.  The Tertian Building and Rock Building, primary elevations.. Northeast to southwest.			





UNITED STATES DEPARTMENT OF THE INTERIOR  
NATIONAL PARK SERVICE


NATIONAL REGISTER OF HISTORIC PLACES  
PROPERTY PHOTOGRAPH FORM

(Type all entries - attach to or enclose with photograph)

STATE Missouri	
COUNTY St. Louis County	
FOR NPS USE ONLY	
ENTRY NUMBER	DATE

SEE INSTRUCTIONS

<b>1. NAME</b>			
COMMON: St. Stanislaus Seminary			
AND/OR HISTORIC: The Rock Building. The Tertian Building. The Juniorate			
<b>2. LOCATION</b>			
STREET AND NUMBER: 700 Howdershell Road			
CITY OR TOWN: Florissant			
STATE: Missouri	CODE 63031	COUNTY: St. Louis County	CODE 189
<b>3. PHOTO REFERENCE</b>			
PHOTO CREDIT: The Story of One-Hundred Years at St. Stanislaus Seminary			
DATE OF PHOTO: C. 1874			
NEGATIVE FILED AT: State Historical Society of Missouri, Columbia, Mo. 65201			
<b>4. IDENTIFICATION</b>			
DESCRIBE VIEW, DIRECTION, ETC.  Rock Building prior to construction of the Tertian Building, south to north. Building in foreground has been destroyed.			

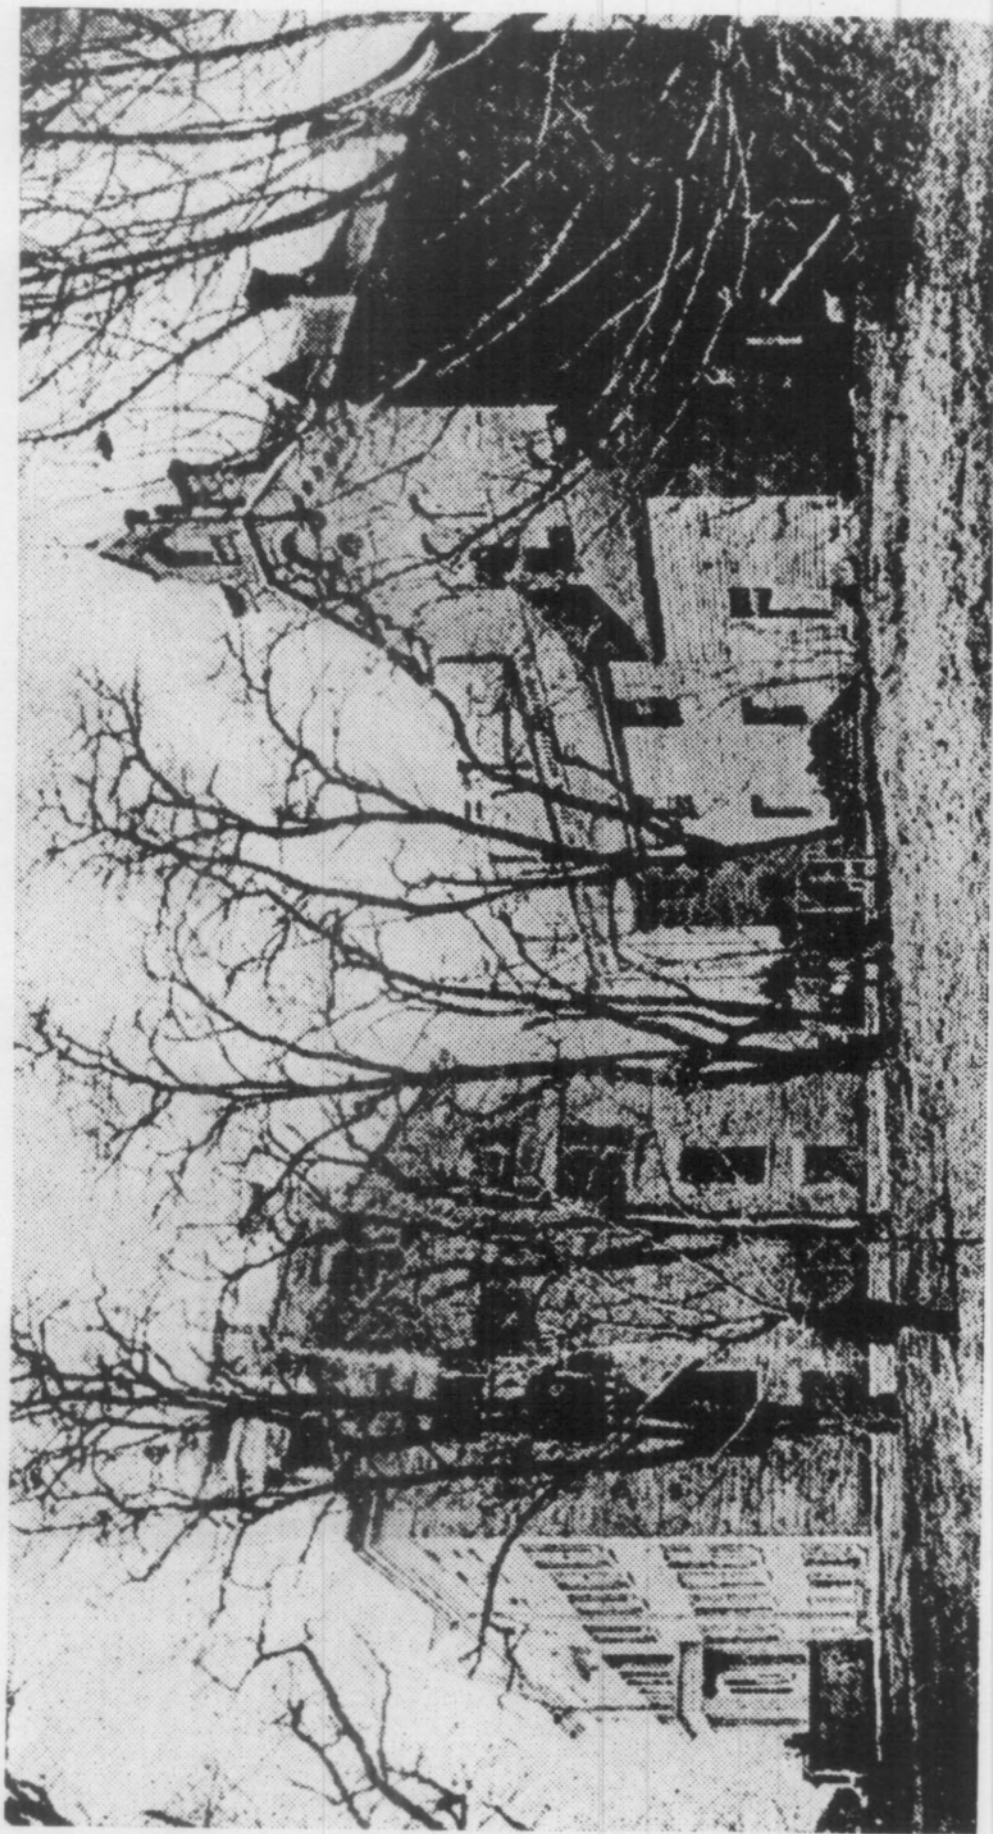



The Museum of the Western Jesuit Missions, at 700 Howdershell Road in Florissant, was built in the 1840's to serve as home of a Jesuit Seminary on the American frontier.

EXTRA  
PHOTOS









